


TECHNICAL DATA				
Type	Symbol	Unit	KNK3053	KNK4053
Standards			IEC/EN 60831-1/2	
Connection			Delta (Three-phase)	
Rated reactive power	Q_n	kVar	up to 40	
Rated voltage	U_n	V	220 ~ 800	
Rated frequency	f_n	Hz	50 or 60	
Capacitance tolerance			-5/10 % (other on request)	
Dielectric losses		W/kVar	≤ 0.2	
Total losses		W/kVar	≤ 0.45	
Temperature category			-40/D	
Max. humidity			95 %	
Cooling			Forced ventilation or natural air cooled	
Max. overvoltage			1.1 x U_n (8 h/day)	
			1.15 x U_n (30 min/day)	
			1.2 x U_n (5 min - 200 times per life time)	
			1.3 x U_n (1 min - 200 times per life time)	
Max. overcurrent			1.5 x I_n (Normal duty) or 2 x I_n (Heavy duty)	
			(including combined effects of overvoltages, harmonics and capacitance tolerance)	
Inrush current			200 x I_n	
Expected life time			> 120000 h (Normal duty)	
			> 150000 h (Heavy duty)	
Discharge resistor			to 75 V ≤ 3 min	
Altitude			up to 2000 m	
Insulation level			4/-	
Routine tests				
Terminal to terminal			2.15 x U_n , 2 s	
Terminal to case			4000 V, 10 s	
Sealing test			N/A	75 °C, 6 h
Mechanical parameters				
Terminal per phase / Terminal height (TH) / Max. torque / Max. current			2 x 25 mm ² / 35 mm / 3 Nm / 60 A for D ≥ 90 mm	
			2 x 16 mm ² / 30 mm / 2 Nm / 35 A for D = 75 mm	
Mounting and grounding / Max. torque			Threaded M12 bolt / 10 Nm	
Mounting position			Vertical with terminal pointing upwards or horizontal	Vertical with terminal pointing upwards
Protection			IP20	
Clearance distance			> 16 mm	
Creepage distance			> 16 mm	
Safety device			Overpressure disconnecter (all phases)	
Material parameters				
Dielectric			Self healing metallized polypropylene film	
Filling			Dry (filled with non PCB polyurethane resin)	Non PCB biodegradable vegetable oil
Case			Aluminium	

PFC Capacitors for Low Voltage (three-phase)

KNK3053, KNK4053 - Cylindrical Aluminium Housing



220 ... 800 V, 5 ... 40 kVar

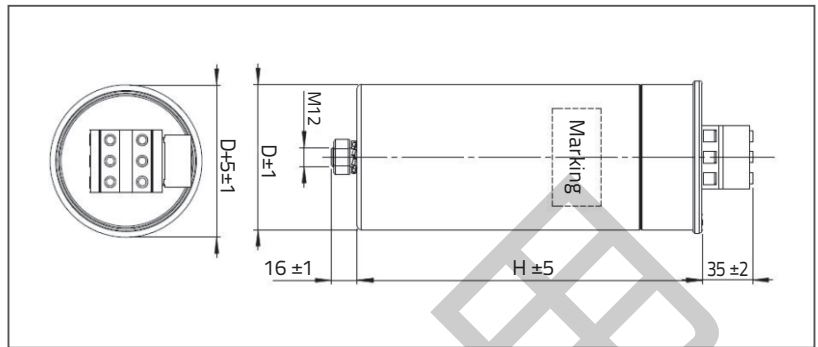

f _n = 50 Hz - Normal duty											
C _n (μF)	Q _n (kVar)	I _n (A)	Q _n (kVar)	I _n (A)	Q _n (kVar)	I _n (A)	D (mm)	H (mm)	Weight (kg)		Packing unit (pcs)
		U _n = 400 V		U _n = 380 V						KNK3053	KNK4053
3 x 33.2	5	7.2	4.5	6.8			75	165	0.9	0.8	16
3 x 49.7	7.5	10.8	6.7	10.2			75	210	1.1	1.0	16
3 x 66.3	10	14.4	9	13.7			75	210	1.1	1.0	16
3 x 82.9	12.5	18	11.3	17.2			75	245	1.4	1.2	16
3 x 99.5	15	21.7	13.5	20.5			90	210	1.5	1.3	16
3 x 132.5	20	28.9	18	27.3			90	245	1.8	1.5	16
3 x 165.8	25	36.1	22.5	34.2			90	285	2.1	1.8	16
3 x 198.9	30	43.1	27	41			116	245	3.0	2.6	9
3 x 265.3	40	57.7	36.1	54.8			116	285	3.6	3.2	9
		U _n = 440 V		U _n = 400 V		U _n = 380 V				KNK3053	KNK4053
3 x 27.4	5	6.6	4.1	5.9	3.7	5.6	75	165	0.9	0.8	16
3 x 41.1	7.5	9.8	6.2	8.9	5.6	8.5	75	210	1.1	1.0	16
3 x 54.8	10	13.1	8.3	12	7.4	11.2	75	245	1.4	1.2	16
3 x 68.5	12.5	16.4	10.4	15	9.3	14.1	90	210	1.5	1.3	16
3 x 82.2	15	19.7	12.4	17.9	11.2	17	90	245	1.8	1.5	16
3 x 109.6	20	26.2	16.6	24	15	22.8	90	285	2.1	1.8	16
3 x 137	25	32.8	20.7	29.9	18.6	28.3	116	210	2.5	2.2	9
3 x 164.4	30	39.4	24.8	35.8	22.4	34	116	245	3.0	2.6	9
3 x 219.2	40	52.5	33.1	47.6	29.8	45.3	116	285	3.6	3.2	9
		U _n = 480 V		U _n = 440 V		U _n = 400 V				KNK3053	KNK4053
3 x 23	5	6	4.2	5.5	3.5	5.1	75	165	0.9	0.8	16
3 x 34.5	7.5	9	6.3	8.3	5.2	7.5	75	210	1.1	1.0	16
3 x 46.1	10	12	8.4	11	7	10.1	75	210	1.1	1.0	16
3 x 57.6	12.5	15	10.5	13.8	8.6	12.4	75	245	1.4	1.2	16
3 x 69.1	15	18	12.7	16.7	10.5	15.2	90	210	1.5	1.3	16
3 x 92.1	20	24.1	16.9	22.2	13.9	20.1	90	245	1.8	1.5	16
3 x 115.1	25	30.1	21	27.6	17.4	25.1	90	285	2.1	1.8	16
3 x 138.2	30	36.1	25.2	33.1	20.8	30	116	210	2.5	2.2	9
3 x 184.2	40	48.1	33.5	44	27.7	40.1	116	285	3.6	3.2	9
		U _n = 525 V		U _n = 480 V		U _n = 440 V				KNK3053	KNK4053
3 x 19.3	5	5.5	4.4	5.1	3.5	4.6	75	165	0.9	0.8	16
3 x 28.9	7.5	8.2	6.2	7.5	5.3	7	75	210	1.1	1.0	16
3 x 38.5	10	11	8.4	10	7	9.2	75	245	1.4	1.2	16
3 x 48.1	12.5	13.7	10.5	12.6	8.8	11.5	75	245	1.4	1.2	16
3 x 57.7	15	16.5	12.5	15	10.5	13.8	90	210	1.5	1.3	16
3 x 77	20	22	16.7	20.1	14	18.4	90	285	2.1	1.8	16
3 x 96.2	25	27.5	20.9	25.1	17.6	23.1	116	210	2.5	2.2	9
3 x 115.5	30	33	25	30.1	21.1	27.7	116	245	3.0	2.6	9
3 x 154	40	44	33.4	40.2	28.1	36.9	116	285	3.6	3.2	9

$f_n = 50 \text{ Hz}$ - Normal duty

C_n (μF)	Q_n (kVar)	I_n (A)	Q_n (kVar)	I_n (A)	Q_n (kVar)	I_n (A)	D (mm)	H (mm)	Weight (kg)		Packing unit (pcs)
$U_n = 690 \text{ V}$											
3 x 11.1	5	4.2					75	165	KNK3053	KNK4053	16
3 x 16.7	7.5	6.3					75	210	1.1	1.0	16
3 x 22.3	10	8.4					75	210	1.1	1.0	16
3 x 27.9	12.5	10.5					75	245	1.4	1.2	16
3 x 33.4	15	12.6					90	210	1.5	1.3	16
3 x 44.6	20	16.7					90	245	1.8	1.5	16
3 x 55.7	25	20.9					116	210	2.5	2.2	16
3 x 66.9	30	25.1					116	245	3.0	2.6	9
3 x 89.1	40	33.5					116	285	3.6	3.2	9
$U_n = 800 \text{ V}$											
3 x 8.3	5	3.6					75	165	KNK3053	KNK4053	16
3 x 12.4	7.5	5.4					75	210	1.1	1.0	16
3 x 16.6	10	7.2					75	245	1.4	1.2	16
3 x 20.7	12.5	9					75	245	1.4	1.2	16
3 x 24.9	15	10.8					90	210	1.5	1.3	16
3 x 33.2	20	14.4					90	285	2.1	1.8	16
3 x 41.5	25	18					116	210	2.5	2.2	9
3 x 49.7	30	21.7					116	245	3.0	2.6	9
3 x 66.3	40	28.9					116	285	3.6	3.2	9

$f_n = 50 \text{ Hz}$ - Heavy duty

C_n (μF)	Q_n (kVar)	I_n (A)	Q_n (kVar)	I_n (A)	Q_n (kVar)	I_n (A)	D (mm)	H (mm)	Weight (kg)		Packing unit (pcs)
$U_n = 400 \text{ V}$											
3 x 33.2	5	7.2	4.5	6.8			75	165	KNK3053	KNK4053	16
3 x 49.7	7.5	10.8	6.7	10.2			75	210	1.1	1.0	16
3 x 66.3	10	14.4	9	13.7			90	210	1.5	1.3	16
3 x 82.9	12.5	18	11.3	17.2			90	245	1.8	1.5	16
3 x 99.5	15	21.7	13.5	20.5			90	245	1.8	1.5	16
3 x 132.5	20	28.9	18	27.3			116	210	2.5	2.2	9
3 x 165.8	25	36.1	22.5	34.2			116	245	3.0	2.6	9
3 x 198.9	30	43.1	27	41			116	285	3.6	3.2	9
3 x 265.3	40	57.7	36.1	54.8			136	285	4.6	4.1	1
$U_n = 440 \text{ V}$											
3 x 27.4	5	6.6	4.1	5.9	3.7	5.6	75	210	KNK3053	KNK4053	16
3 x 41.1	7.5	9.8	6.2	8.9	5.6	8.5	75	245	1.4	1.2	16
3 x 54.8	10	13.1	8.3	12	7.4	11.2	90	210	1.5	1.3	16
3 x 68.5	12.5	16.4	10.4	15	9.3	14.1	90	245	1.8	1.5	16
3 x 82.2	15	19.7	12.4	17.9	11.2	17	90	285	2.1	1.8	16
3 x 109.6	20	26.2	16.6	24	15	22.8	116	245	3.0	2.6	9
3 x 137	25	32.8	20.7	29.9	18.6	28.3	116	245	3.0	2.6	9
3 x 164.4	30	39.4	24.8	35.8	22.4	34	116	285	3.6	3.2	9
3 x 219.2	40	52.5	33.1	47.6	29.8	45.3	136	285	4.6	4.1	1
$U_n = 480 \text{ V}$											
3 x 23	5	6	4.2	5.5	3.5	5.1	75	165	KNK3053	KNK4053	16
3 x 34.5	7.5	9	6.3	8.3	5.2	7.5	75	210	1.1	1.0	16
3 x 46.1	10	12	8.4	11	7	10.1	75	245	1.4	1.2	16
3 x 57.6	12.5	15	10.5	13.8	8.6	12.4	90	210	1.5	1.3	16
3 x 69.1	15	18	12.7	16.7	10.5	15.2	90	245	1.8	1.5	16
3 x 92.1	20	24.1	16.9	22.2	13.9	20.1	90	285	2.1	1.8	16
3 x 115.1	25	30.1	21	27.6	17.4	25.1	116	245	3.0	2.6	9
3 x 138.2	30	36.1	25.2	33.1	20.8	30	116	285	3.6	3.2	9
3 x 184.2	40	48.1	33.5	44	27.7	40.1	136	245	4.0	3.6	1
$U_n = 525 \text{ V}$											
3 x 19.3	5	5.5	4.4	5.1	3.5	4.6	75	165	KNK3053	KNK4053	16
3 x 28.9	7.5	8.2	6.2	7.5	5.3	7	75	165	1.2	1.1	16
3 x 38.5	10	11	8.4	10	7	9.2	75	210	1.5	1.3	16
3 x 48.1	12.5	13.7	10.5	12.6	8.8	11.5	90	245	1.8	1.5	16
3 x 57.7	15	16.5	12.5	15	10.5	13.8	90	285	2.1	1.8	16
3 x 77	20	22	16.7	20.1	14	18.4	116	210	2.5	2.2	9
3 x 96.2	25	27.5	20.9	25.1	17.6	23.1	116	245	3.0	2.6	9
3 x 115.5	30	33	25	30.1	21.1	27.7	116	285	3.6	3.2	9
3 x 154	40	44	33.4	40.2	28.1	36.9	136	285	4.6	4.1	1

PFC Capacitors for Low Voltage (three-phase)

KNK3053, KNK4053 - Cylindrical Aluminium Housing



$f_n = 50 \text{ Hz}$ - Heavy duty

C_n (μF)	Q_n (kVar)	I_n (A)	Q_n (kVar)	I_n (A)	Q_n (kVar)	I_n (A)	D (mm)	H (mm)	Weight (kg)		Packing unit (pcs)
$U_n = 690 \text{ V}$											
3 x 11.1	5	4.2					75	165	KNK3053	KNK4053	16
3 x 16.7	7.5	6.3					90	165	1.2	1.1	16
3 x 22.3	10	8.4					90	210	1.5	1.3	16
3 x 27.9	12.5	10.5					90	245	1.8	1.5	16
3 x 33.4	15	12.6					90	285	2.1	1.8	16
3 x 44.6	20	16.7					116	210	2.5	2.2	9
3 x 55.7	25	20.9					116	245	3.0	2.6	9
3 x 66.9	30	25.1					116	285	3.6	3.2	9
3 x 89.1	40	33.5					1366	285	4.6	4.1	1
$U_n = 800 \text{ V}$											
3 x 8.3	5	3.6					75	210	KNK3053	KNK4053	16
3 x 12.4	7.5	5.4					75	245	1.1	1.0	16
3 x 16.6	10	7.2					90	210	1.4	1.2	16
3 x 20.7	12.5	9					90	245	1.5	1.3	16
3 x 24.9	15	10.8					90	285	1.8	1.5	16
3 x 33.2	20	14.4					116	210	2.1	1.8	16
3 x 41.5	25	18					116	245	2.5	2.2	9
3 x 49.7	30	21.7					116	285	3.0	2.6	9
3 x 66.3	40	28.9					136	285	3.6	3.2	9
									4.6	4.1	1

$f_n = 60 \text{ Hz}$ - Normal duty

C_n (μF)	Q_n (kVar)	I_n (A)	Q_n (kVar)	I_n (A)	Q_n (kVar)	I_n (A)	D (mm)	H (mm)	Weight (kg)		Packing unit (pcs)
$U_n = 400 \text{ V}$											
3 x 27.6	5	7.2	4.5	6.8			75	165	KNK3053	KNK4053	16
3 x 41.5	7.5	10.8	6.7	10.2			75	165	0.9	0.8	16
3 x 55.3	10	14.4	9	13.7			75	210	1.1	1.0	16
3 x 69.1	12.5	18	11.3	17.2			75	245	1.4	1.2	16
3 x 82.9	15	21.7	13.5	20.5			75	245	1.4	1.2	16
3 x 110.5	20	28.9	18	27.3			90	245	1.8	1.5	16
3 x 138.2	25	36.1	22.6	34.3			90	285	2.1	1.8	16
3 x 165.8	30	43.1	27	41			116	210	2.5	2.2	9
3 x 221.1	40	57.7	36.1	54.8			116	245	3.0	2.6	9
$U_n = 380 \text{ V}$											
3 x 22.8	5	6.6	4.1	5.9	3.7	5.6	75	165	KNK3053	KNK4053	16
3 x 34.3	7.5	9.8	6.2	8.9	5.6	8.5	75	210	0.9	0.8	16
3 x 45.7	10	13.1	8.3	12	7.5	11.4	75	210	1.1	1.0	16
3 x 57.1	12.5	16.4	10.4	14.9	9.3	14.1	75	245	1.4	1.2	16
3 x 68.5	15	19.7	12.4	17.9	11.2	17	90	210	1.5	1.3	16
3 x 91.3	20	26.2	16.6	23.8	14.9	22.6	90	245	1.8	1.5	16
3 x 114.2	25	32.8	20.7	29.9	18.7	28.4	90	285	2.1	1.8	16
3 x 137	30	39.4	24.8	35.8	22.4	34	116	210	2.5	2.2	9
3 x 182.7	40	52.5	33.1	47.6	29.8	45.3	116	285	3.6	3.2	9
$U_n = 440 \text{ V}$											
3 x 19.2	5	6	4.2	5.5	3.5	5.1	75	165	KNK3053	KNK4053	16
3 x 28.8	7.5	9	6.3	8.3	5.2	7.5	75	165	0.9	0.8	16
3 x 38.4	10	12	8.4	11	7	10.1	75	210	1.1	1.0	16
3 x 50	12.5	15	11	14.4	9	13	75	245	1.4	1.2	16
3 x 57.6	15	18	12.8	16.8	10.4	15	75	245	1.4	1.2	16
3 x 76.8	20	24.1	16.8	22	13.9	20.1	90	210	1.5	1.3	16
3 x 95.9	25	30.1	21	27.6	17.4	25.1	90	245	1.8	1.5	16
3 x 115.1	30	36.1	25.2	33.1	20.8	30	90	285	2.1	1.8	16
3 x 153.5	40	48.1	33.6	44.1	27.8	40.1	116	245	3.0	2.6	9
$U_n = 480 \text{ V}$											
3 x 16	5	6.5	4.2	5.1	3.5	4.6	75	165	KNK3053	KNK4053	16
3 x 24.1	7.5	8.2	6.3	7.6	5.3	7	75	165	0.9	0.8	16
3 x 32.1	10	11	8.4	10.1	7	9.2	75	210	1.1	1.0	16
3 x 40.1	12.5	13.7	10.5	12.6	8.8	11.5	75	245	1.4	1.2	16
3 x 48.1	15	16.5	12.5	15	10.5	13.8	75	245	1.4	1.2	16
3 x 64.2	20	22	16.7	20.1	14.1	18.5	90	245	1.8	1.5	16
3 x 80.2	25	27.5	21	25.3	17.5	23	90	285	2.1	1.8	16
3 x 96.2	30	33	25.1	30.2	21	27.6	116	210	2.5	2.2	9
3 x 128.3	40	44	33.5	40.3	28.1	36.9	116	245	3.0	2.6	9

$f_n = 60 \text{ Hz}$ - Normal duty

C_n (μF)	Q_n (kVar)	I_n (A)	Q_n (kVar)	I_n (A)	Q_n (kVar)	I_n (A)	D (mm)	H (mm)	Weight (kg)		Packing unit (pcs)
$U_n = 690 \text{ V}$											
3 x 9.3	5	4.2					75	165	KNK3053	KNK4053	16
3 x 13.9	7.5	6.3					75	165	0.9	0.8	16
3 x 18.6	10	8.4					75	210	1.1	1.0	16
3 x 23.2	12.5	10.5					75	245	1.4	1.2	16
3 x 27.9	15	12.6					75	245	1.4	1.2	16
3 x 37.1	20	16.7					90	245	1.8	1.5	16
3 x 46.4	25	20.9					90	245	1.8	1.5	16
3 x 55.7	30	25.1					90	285	2.1	1.8	16
3 x 74.3	40	33.5					116	245	3.0	2.6	9
$U_n = 800 \text{ V}$											
3 x 6.9	5	3.6					75	165	KNK3053	KNK4053	16
3 x 10.4	7.5	5.4					75	165	0.9	0.8	16
3 x 13.8	10	7.2					75	210	1.1	1.0	16
3 x 17.3	12.5	9					75	245	1.4	1.2	16
3 x 20.7	15	10.8					90	210	1.5	1.3	16
3 x 27.6	20	14.4					90	245	1.8	1.5	16
3 x 34.5	25	18					90	285	2.1	1.8	16
3 x 41.6	30	21.7					116	210	2.5	2.2	9
3 x 55.3	40	28.9					116	245	3.0	2.6	9

$f_n = 60 \text{ Hz}$ - Heavy duty

C_n (μF)	Q_n (kVar)	I_n (A)	Q_n (kVar)	I_n (A)	Q_n (kVar)	I_n (A)	D (mm)	H (mm)	Weight (kg)		Packing unit (pcs)
$U_n = 400 \text{ V}$											
3 x 27.6	5	7.2	4.5	6.8			75	165	KNK3053	KNK4053	16
3 x 41.5	7.5	10.8	6.7	10.2			75	210	1.1	1.0	16
3 x 55.3	10	14.4	9	13.7			75	245	1.4	1.2	16
3 x 69.1	12.5	18	11.3	17.2			90	210	1.5	1.3	16
3 x 82.9	15	21.7	13.5	20.5			90	245	1.8	1.5	16
3 x 110.5	20	28.9	18	27.3			90	285	2.1	1.8	16
3 x 138.2	25	36.1	22.6	34.3			116	210	2.5	2.2	9
3 x 165.8	30	43.3	27	41			116	245	3.0	2.6	9
3 x 221.1	40	57.7	36.1	54.8			136	245	4.0	3.6	1
$U_n = 440 \text{ V}$											
3 x 22.8	5	6.6	4.1	5.9	3.7	5.6	75	165	KNK3053	KNK4053	16
3 x 34.3	7.5	9.8	6.2	8.9	5.6	8.5	75	210	1.1	1.0	16
3 x 45.7	10	13.1	8.3	12	7.5	11.4	75	245	1.4	1.2	16
3 x 57.1	12.5	16.4	10.3	14.9	9.3	14.1	90	210	1.5	1.3	16
3 x 68.5	15	19.7	12.4	17.9	11.2	17	90	245	1.8	1.5	16
3 x 91.3	20	26.2	16.5	23.8	14.9	22.6	90	285	2.1	1.8	16
3 x 114.2	25	32.8	20.7	29.9	18.7	28.4	116	245	3.0	2.6	9
3 x 137	30	39.4	24.8	35.8	22.4	34	116	245	3.0	2.6	9
3 x 182.7	40	52.5	33.1	47.6	29.8	45.3	136	245	4.0	3.6	1
$U_n = 480 \text{ V}$											
3 x 19.2	5	6	4.2	5.5	3.5	5.1	75	165	KNK3053	KNK4053	16
3 x 28.8	7.5	9	6.3	8.3	5.2	7.5	75	210	1.1	1.0	16
3 x 38.4	10	12	8.4	11	7	10.1	75	245	1.4	1.2	16
3 x 50	12.5	15	11	14.4	9	13	90	210	1.5	1.3	16
3 x 57.6	15	18	12.8	16.8	10.4	15	90	210	1.5	1.3	16
3 x 76.8	20	24.1	16.8	22	13.9	20.1	90	245	1.8	1.5	16
3 x 95.9	25	30.1	21	27.6	17.4	25.1	116	210	2.5	2.2	9
3 x 115.1	30	36.1	25.2	33.1	20.8	30	116	245	3.0	2.6	9
3 x 153.5	40	48.1	33.6	44.1	27.8	40.1	116	285	3.6	3.2	9
$U_n = 525 \text{ V}$											
3 x 16	5	6.5	4.2	5.1	3.5	4.6	75	165	KNK3053	KNK4053	16
3 x 24.1	7.5	8.2	6.3	7.6	5.3	7	75	210	1.1	1.0	16
3 x 32.1	10	11	8.4	10.1	7	9.2	75	245	1.4	1.2	16
3 x 40.1	12.5	13.7	10.5	12.6	8.8	11.5	90	210	1.5	1.3	16
3 x 48.1	15	16.5	12.5	15	10.5	13.8	90	245	1.8	1.5	16
3 x 64.2	20	22	16.7	20.1	14.1	18.5	90	285	2.1	1.8	16
3 x 80.2	25	27.5	21	25.3	17.5	23	116	210	2.5	2.2	9
3 x 96.2	30	33	25.1	30.2	21	27.6	116	245	3.0	2.6	9
3 x 128.3	40	44	33.5	40.3	28.1	36.9	116	285	3.6	3.2	9

PFC Capacitors for Low Voltage (three-phase)

KNK3053, KNK4053 - Cylindrical Aluminium Housing



f _n = 60 Hz - Heavy duty											
C _n (μF)	Q _n (kVar)	I _n (A)	Q _n (kVar)	I _n (A)	Q _n (kVar)	I _n (A)	D (mm)	H (mm)	Weight (kg)		Packing unit (pcs)
U _n = 690 V											
3 x 9.3	5	4.2					75	165	KNK3053	KNK4053	16
3 x 13.9	7.5	6.3					75	210	1.1	1.0	16
3 x 18.6	10	8.4					75	245	1.4	1.2	16
3 x 23.2	12.5	10.5					90	210	1.5	1.3	16
3 x 27.9	15	12.6					90	245	1.8	1.5	16
3 x 37.1	20	16.7					90	285	2.1	1.8	16
3 x 46.4	25	20.9					116	245	3.0	2.6	9
3 x 55.7	30	25.1					116	245	3.0	2.6	9
3 x 74.3	40	33.5					136	245	4.0	3.6	1
U _n = 800 V											
3 x 6.9	5	3.6					75	165	KNK3053	KNK4053	16
3 x 10.4	7.5	5.4					75	210	1.1	1.0	16
3 x 13.8	10	7.2					75	245	1.4	1.2	16
3 x 17.3	12.5	9					90	210	1.5	1.3	16
3 x 20.7	15	10.8					90	245	1.8	1.5	16
3 x 27.6	20	14.4					90	285	2.1	1.8	16
3 x 34.5	25	18					116	245	3.0	2.6	9
3 x 41.6	30	21.7					116	245	3.0	2.6	9
3 x 55.3	40	28.9					136	245	4.0	3.6	1

如盈科技